




## M8000 Float Switch (FLT002)

- Versatile, economical and compact.
- UL Recognized part used in thousands of products.
- Normally closed; float can be removed, inverted and replaced for normally open operation.
- 1/8" NPT tapered stem threading; self-sealing; does not come with a nut.
- Warranted against manufacturer defect for one year from delivery date.

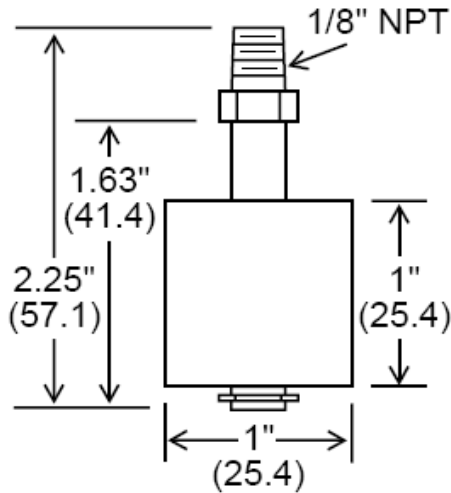

Unit: Inches (mm)

**Operation:** When the float drops to within .12" (+/- .04") of the bottom clip, the internal reed contacts draw together and complete a circuit. When the float rises .20" (+/- .04") from the bottom clip, the contacts separate and open the circuit.

### Materials:

|           |                          |
|-----------|--------------------------|
| Float:    | Polypropylene Foam       |
| Stem:     | Polypropylene            |
| O-ring:   | None (tapered threading) |
| Clip:     | Polypropylene            |
| Leads:    | 22 ga. MTW, 24", white   |
| Top Fill: | Epoxy                    |

### Specifications:\*

|                   |              |
|-------------------|--------------|
| Temperature:      | +105°C       |
| Contact rating:   | 30VA         |
| Max Pressure:     | 100 PSIG     |
| Approvals:        | UL, CSA, NSF |
| Specific Gravity: | .8           |

\*Can be customized to your requirements